


## 7340 Rotary fitting a Tees with O.Ring Seal

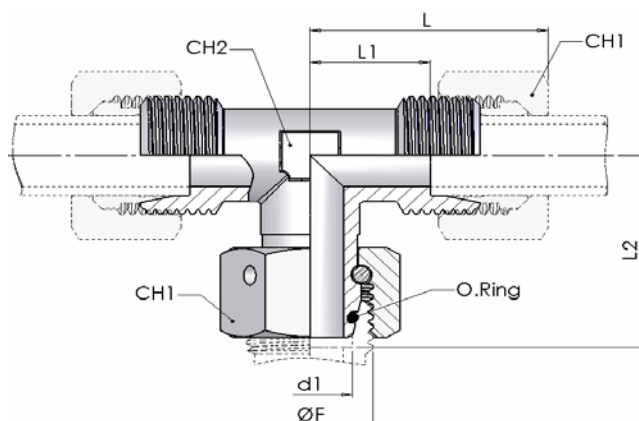

W.P.		part number (body only)	Ø tube	Dimensions						O.Ring*
bar			d1	L	L1	L2	ØF1	CH1	CH2	mm
L	315	7340-06L-1	6	27	12,0	26	12x1,5	14	12	4x1,5
		7340-08L-1	8	29	14,0	27,5	14x1,5	17	12	6x1,5
		7340-10L-1	10	30	15,0	29	16x1,5	19	14	7,5x1,5
		7340-12L-1	12	32	17,0	29,5	18x1,5	22	17	9x1,5
		7340-15L-1	15	36	21,0	32,5	22x1,5	27	19	12x2
		7340-18L-1	18	40	23,5	35,5	26x1,5	32	24	15x2
	160	7340-22L-1	22	44	27,5	38,5	30x2	36	27	20x2
		7340-28L-1	28	47	30,5	41,5	36x2	41	36	26x2
		7340-35L-1	35	56	34,5	51	45x2	50	41	32x2,5
		7340-42L-1	42	63	40,0	56	52x2	60	50	38x2,5
S	630	7340-06S-1	6	31	16,0	27	14x1,5	17	12	4x1,5
		7340-08S-1	8	32	17,0	27,5	16x1,5	19	14	6x1,5
		7340-10S-1	10	34	17,5	30	18x1,5	22	17	7,5x1,5
		7340-12S-1	12	38	21,5	31	20x1,5	24	17	9x1,5
		7340-14S-1	14	40	22,0	35	22x1,5	27	19	10x2
	400	7340-16S-1	16	43	24,5	36,5	24x1,5	30	24	12x2
		7340-20S-1	20	48	26,5	44,5	30x2	36	27	16,3x2,4
		7340-25S-1	25	54	30,0	50	36x2	46	36	20,3x2,4
		7340-30S-1	30	62	35,5	55	42x2	50	41	25,3x2,4
	315	7340-38S-1	38	72	41,0	63	52x2	60	50	33,3x2,4

\* - Temperature range without pressure reductions with connections fitted with O.Ring in NBR (standard) and FPM (to order):  
NBR(Perbunan): from -35° to +100°C - FPM (Viton): from -25° to +120°C