
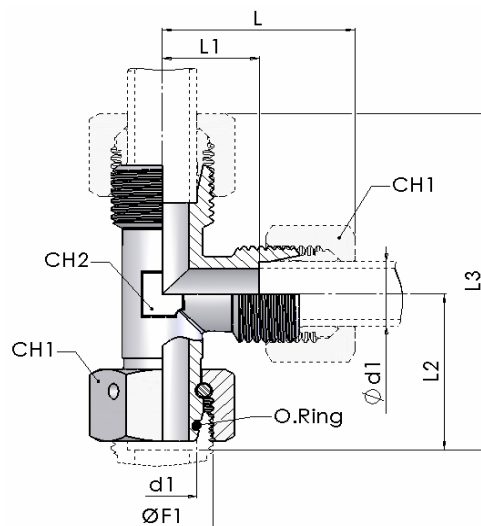


7350 Rotary fitting a L with O.Ring Seal



W.P.		part number (body only)	Ø tube	Dimensions							O.Ring*
bar			d1	L	L1	L2	L3	ØF1	CH1	CH2	mm
L	315	7350-06L-1	6	27	12,0	26	53	12x1,5	14	12	4x1,5
		7350-08L-1	8	29	14,0	27,5	56	14x1,5	17	12	6x1,5
		7350-10L-1	10	30	15,0	29	59	16x1,5	19	14	7,5x1,5
		7350-12L-1	12	32	17,0	29,5	61	18x1,5	22	17	9x1,5
		7350-15L-1	15	36	21,0	32,5	69	22x1,5	27	19	12x2
		7350-18L-1	18	40	23,5	35,5	75	26x1,5	32	24	15x2
	160	7350-22L-1	22	44	27,5	38,5	82	30x2	36	27	20x2
		7350-28L-1	28	47	30,5	41,5	89	36x2	41	36	26x2
		7350-35L-1	35	56	34,5	51	107	45x2	50	41	32x2,5
		7350-42L-1	42	63	40,0	56	119	52x2	60	50	38x2,5
S	630	7350-06S-1	6	31	16,0	27	58	14x1,5	17	12	4x1,5
		7350-08S-1	8	32	17,0	27,5	59	16x1,5	19	14	6x1,5
		7350-10S-1	10	34	17,5	30	64	18x1,5	22	17	7,5x1,5
		7350-12S-1	12	38	21,5	31	69	20x1,5	24	17	9x1,5
		7350-14S-1	14	40	22,0	35	75	22x1,5	27	19	10x2
	400	7350-16S-1	16	43	24,5	36,5	79	24x1,5	30	24	12x2
		7350-20S-1	20	48	26,5	44,5	93	30x2	36	27	16,3x2,4
		7350-25S-1	25	54	30,0	50	104	36x2	46	36	20,3x2,4
		7350-30S-1	30	62	35,5	55	117	42x2	50	41	25,3x2,4
	315	7350-38S-1	38	72	41,0	63	135	52x2	60	50	33,3x2,4

* - Temperature range without pressure reductions with connections fitted with O.Ring in NBR (standard) and FPM (to order):
NBR(Perbunan): from -35° to +100°C - FPM (Viton): from -25° to +120°C